


Doodle Labs Prism-WiFi Transceiver – NM-3600

High Performance COFDM/MIMO Broadband Transceiver with miniPCIe

Prism-WiFi Transceiver Overview

Doodle Labs’ Prism-WiFi are frequency shifted long range Industrial Wi-Fi transceivers. The Prism-WiFi transceivers are targeted for wireless broadband IIoT applications. With up to 1W of RF power and 2x2 MIMO technology, the Prism-WiFi transceiver can transmit large amounts of data (e.g. HD video) in real-time from over 20 km away. The Prism-WiFi’s flexible frequency architecture can satisfy customers’ requirements in any market or country. The Prism-WiFi are available in many frequency bands up to 6 GHz and have been designed to be interchangeable, allowing customers to switch the operating bands by simply swapping the transceiver. These transceivers have been field proven in numerous demanding applications requiring high RF performance while withstanding harsh operating environments.

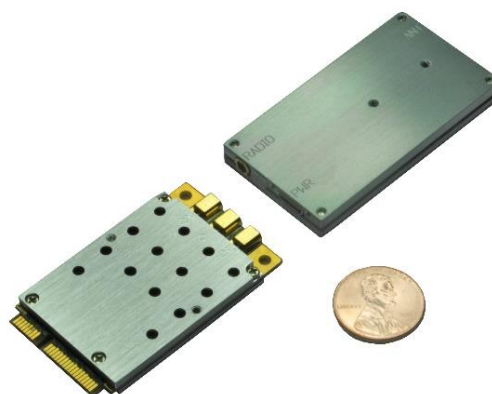

Key Features

PERFORMANCE RF

- Interference resistant COFDM for improved link quality in busy RF environments
- Adaptive radio modulations from DSSS up to 64QAM and continuous per packet optimization to maximize link performance in dynamic environments
- Software defined channel size of 5~40 MHz for efficient re-use of spectrum
- Software defined operating frequency band for global applications
- Exceptional Multipath and NLOS performance
- Convolutional Coding, Forward error correction (FEC), Ack-retransmits for robust data transmission over noisy spectrum
- Maximal Ratio Combining and beam forming for diversity antenna gain
- Spatial Multiplexing for enhanced throughput

Enabling Industrial Internet Revolution

Data Sheet

- Space Time Block Coding for increased robustness
- Time Division Duplexing (TDD) for bi-directional traffic
- Distributed control with CSMA/CA to auto balance the network for asymmetric up/down traffic and throughput requirements of each node
- Long range (up to 20 km) with adjustable RF power to reduce interference
- Fast handoff for mobile applications

PERFORMANCE NETWORKING

- High data throughput up to 100 Mbps
- Advanced QOS and multimedia traffic prioritizations for low latency Command and Control as well as HD video streaming on the same link
- Multiple network access and authentication methods

- AES128, 128-bit WPA2-PSK encryption for over the air data

ADDITIONAL FEATURES

- Very small size, weight, and power (SWaP) for mobile applications
- Available in 100 MHz – 6 GHz frequency range in form factor compatible models
- Rugged construction, Industrial temperature range (-40C to +85C)
- Field proven and deployed in critical applications where failure is not an option
- COTS – Commercial off the Shelf

TARGET APPLICATIONS

- Mobile and Fixed wireless – PtP and PtmP networks
- Wireless Ethernet extensions

Band Introduction – 3600 MHz ISM Band

The European Commission (EC) supports ‘Rapid access to spectrum for wireless electronic communications services through more flexibility’. In accordance with this, the EC has adopted a decision on the harmonization of the Pan-European 3400-3800 MHz frequency band for fixed, nomadic and mobile applications in the European Union (EU). Technological neutrality and service neutrality have been underlined by Member States in the Radio Spectrum Policy Group (RSPG) opinion to achieve a more flexible use of spectrum.

The Pan-European designation of the 3 400-3 800 MHz band for fixed, nomadic and mobile applications offers a significant opportunity to install high-density and high-speed broadband wireless networks, which can provide innovative Broadband communication services to end users.

Enabling Industrial Internet Revolution


Data Sheet

The entire band is assigned to Mobile service (except aeronautical mobile) and Fixed services (PtM and PtP). In the lower half, 3400-3600 MHz frequency band, both the FDD and the TDD modes are allowed, but TDD is the preferred mode. In the upper half, 3600-3800 MHz frequency band, only TDD allocation is defined, therefore only TDD systems can be used here. Block Edge Masks (BEM) are technical parameters that apply to the entire block of spectrum of a specific user, irrespective of the number of channels occupied by the user's chosen technology.

Doodle Labs Products for 3600 MHz Band

Description	Model No.
1x1 COFDM Broadband Transceiver with miniPCIe interface	NM-3600-1G
2x2 MIMO Broadband Transceiver with miniPCIe interface	NM-3600-2H
1x1 COFDM WiFi Frequency Shifter	GM-3600-1
2x2 MIMO WiFi Frequency Shifter	HM-3600-2
1x1 COFDM Smart Radio with Ethernet interface	RM-3600-1G
2x2 MIMO Smart Radio with Ethernet interface	RM-3600-2H

System Integration

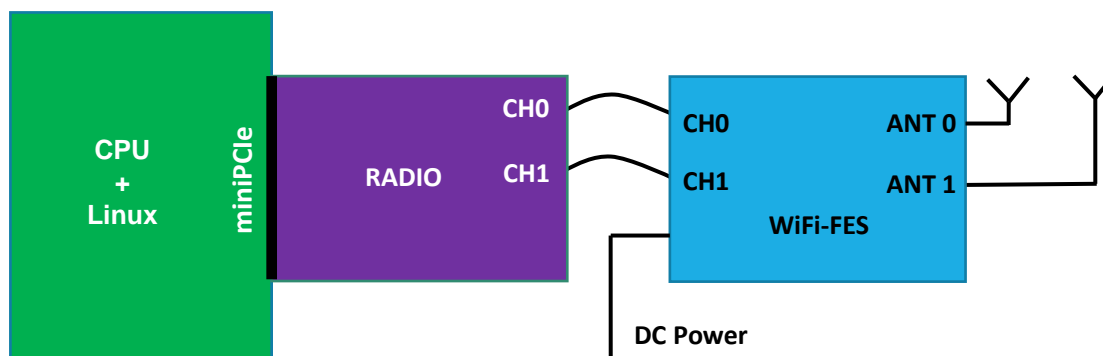

The Prism-WiFi is easy to integrate with CPU boards. Any embedded SBC with standard miniPCI-Express can be used. The Linux distribution [OpenWRT](#) with advanced features is a good starting point for customized wireless modem development. The distribution includes

Data Sheet

the open source [ath9k](#) driver to interface with the Prism-WiFi transceivers. Both OpenWRT and ath9k have extensive online documentation available.

Doodle Labs provides following documents upon request - Integration Guide, 3D CAD model, Mechanical Drawing and Cable Drawing.

Technical Specifications (3600 MHz Band)

Model No.	NM-3600-1G	NM-3600-2H
Radio Configuration	1x1 COFDM	2x2 MIMO
Frequency Range	3400-3800 MHz	
Data Throughput (64 QAM, 20 MHz BW)	50 Mbps	100 Mbps
Operating Range (Indicative)	10 Km	20 Km
	15 dBi antenna on both sides, 20 dBm fade margin, BPSK rate	
Channel Bandwidth	5, 10, and 20 MHz	
Operating Modes	AP, Client and Adhoc modes to implement Access Point, PtP, PtmP, and Mesh networks	
Radio Data Rates (Dynamic Link Adaptation)	1, 2, 5.5, 6, 9, 11, 12, 18, 24, 36, 48 and 54 Mbps, MCS0-7	1, 2, 5.5, 6, 9, 11, 12, 18, 24, 36, 48 and 54 Mbps, MCS0-15
Wireless Protocol	TDD with Carrier Sense Multiple Access with Collision Avoidance	
Wireless Error Correction	FEC, ARQ	
Wireless Data Encryption	128-bit AES, 64 and 128-bit WPA2-PSK data encryption	
Special Features	Extended lifespan with many years' planned availability. Extreme Reliability, IPC Class 2 standard with Class 3 options. Compliant to MIL-STD-202G for high shock/vibration environments	
HARDWARE SPECIFICATIONS		
RF Power Output	0.25W (24 dBm) @ BPSK	0.5W (27 dBm) @ BPSK

Enabling Industrial Internet Revolution

Data Sheet

Model No.	NM-3600-1G	NM-3600-2H
	0.25W (24 dBm) @ 16QAM 75 mW (18 dBm) @ 64QAM	0.5W (27 dBm) @ 16QAM 125 mW (21 dBm) @ 64QAM
RF Power Control by driver	In 0.5 dBm steps. Accuracy of power calibration loop ± 2 dBm. Each transceiver individually calibrated and tested.	
Rx Sensitivity (5 MHz Channel BW)	-95 dBm @ BPSK -86 dBm @ 16QAM -79 dBm @ 64QAM	-98 dBm @ BPSK -89 dBm @ 16QAM -82 dBm @ 64QAM
	The Rx sensitivity reduces by 3 dBm when doubling the Channel bandwidth. It is advantageous to use the smallest Channel Bandwidth that can support the Throughput requirements. Smaller bandwidths provide more channels in the band and help avoid interference issues. The system's SNR is higher at smaller Channel Bandwidths and Range is longer.	
Software Support	Open Source ath9k Linux Driver OpenWRT (Wireless Router/Linux OS)	
MAC Chipset	Qualcomm Atheros QCA9590-BR4B with Extended Temperature range	
Host CPU Board	Any CPU board with Industry standard miniPCI-Express interface with minimum 6 mm connector height	
Operating Voltage	3.3 Volts from miniPCI-E interface for radio 6~40V for FES	
Power Consumption	- Total 6W (4W @ Max power for FES + 2W for radio module) in data transfer mode - Total 2.8W (1.3W for FES + 1.5W for radio module) in data receive mode @ Max power, in continuous data transfer mode	- Total 10W (8W @ Max power for FES + 2W for radio module) in data transfer mode - Total 4W (2.5W for FES + 1.5W for radio module) in data receive mode @ Max power, in continuous data transfer mode
Antenna Signal Strength	-35 to -85 dBm (Recommended), Absolute Maximum=+12 dBm	
Integrated Antenna Port Protection	Able to withstand open port, >10 KV (contact) and >15KV (open air discharge) as per IEC-6100-4-2	

Enabling Industrial Internet Revolution

Data Sheet

Model No.	NM-3600-1G	NM-3600-2H
Receiver LNA Gain	>10 dB	
Receiver Adjacent Channel Rejection (ACR)	>18 dB @ 6 Mbps (Typ)	
Receiver Alternate Channel Rejection (ALCR)	>35 dB @ 6 Mbps (Typ)	
Receive chain Noise Figure	6 dB	
Transmitter Adjacent Channel Leakage Power Ratio (ACLR)	45 dB (Fc ± ChBW)	
Transmitter Spurious Emission Suppression	-40 dBc	
Freq Accuracy	±10 ppm Max	
Control for External Power Amp	DC biased signal over RF ports	
PHYSICAL, ENVIRONMENTAL SPECIFICATIONS		
Dimensions (Mechanical drawing and 3D-CAD files available upon request)	30 x 50 x 6 mm Radio module 30 x 56 x 6 mm FES module Total 27 grams (14 + 23)	30 x 50 x 6 mm Radio module 60 x 56 x 6 mm FES module Total 50 grams (14 + 36)
Antenna Connection	1x MMCX-Female	2x MMCX-Female
Host Interface	miniPCI-Express 1.2 Standard	
Cable Assembly	Initial samples Include the harness with RF cable and DC power. Cable assembly drawing available upon request.	
Shield case temperature range (Operating)	-40°C to +85°C System's thermal design should ensure that the transceiver's case temperature is maintained within these specifications.	
Humidity (Operating)	0% – 95% (Non-condensing)	
OTHER SPECIFICATIONS		
MTBF	25 years	
Regulatory Requirements	Designed and Verified to meet various regulatory requirements. Formal testing and approval is required based on the Integrator's particular host platform and antenna type.	

Data Sheet

Model No.	NM-3600-1G	NM-3600-2H
	The Integrator is also responsible for obtaining all required regulatory approvals in target markets for the finished product.	
RoHS/WEEE Compliance	Yes. 100% Recyclable/Biodegradable packaging	

* Specifications are subject to change without prior notice.

Portfolio Index

Doodle Labs' Industrial IoT Smart Radio portfolio provides configurations optimized for a vast variety of project needs. All models are form-factor compatible. For information on other models, please visit - <https://www.doodlelabs.com/products/industrial-iot-radio-platform/>